

Technical data :

Rated operating distance (Sn)	3 mm (*)
Mounting mode	Flush
(*) The rated operating distance is reached when mounted in a SDPM14C Senstronic's sensor holder	
Function	NO
Operating voltage	10...30 V DC
Operating current	2...100 mA
Voltage drop	< 5 V
Residual current	< 800 µA
Ambient temperature range	0...70 °C
Hysteresis	3...15 %
Repeatability	< 5 %
Switching frequency	300 Hz

Protection :

Reverse polarity protection	
Short-circuit protection	
Overload protection	
IEC 61000-4-2 (ESD)	4kV Contact / 8kV Air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz...80MHz
Protection degree	IP67

Materials :

Housing	Brass, nickel-plated
Sensing face	PA

Status indication :

Output	Yellow LED
--------	------------

Connection :

Connector	M12
Cable	PUR, halogen free
Cable length	0,3 m (0/+30 mm)

Accessories (included) :


- 2 nickel-plated brass fixing nuts
- 1 Stainless steel toothed locked washer

A1202D03M120311PU


M12



Dimensions :

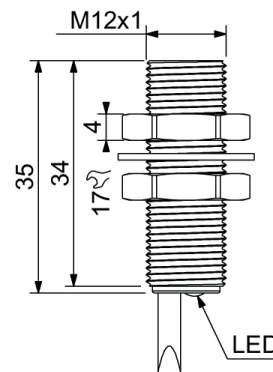

Connection diagram :



Pin assignment :

