

### Technical data :

Rated operating distance (Sn)	5 mm
Mounting mode	Flush
Output type	PNP
Function	NO
Operating voltage	10...30V DC
Operating current	200 mA
No-load consumption	< 10 mA
Voltage drop	< 2 V
Residual current	< 70 $\mu$ A
Ambient temperature range	-25...70 °C
Hysteresis	3...15 %
Repeatability	< 5 %
Switching frequency	600 Hz

### Protection :

Reverse polarity protection	
Short-circuit protection	
Overload protection	
IEC 61000-4-2 (ESD)	4kV Contact / 8kV Air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz...80MHz
Protection degree	IP67

### Materials :

Housing	Anodized aluminium
Sensing face	PA

### Status indication :


Power	Green LED
Output	Yellow LED

### Connection :

Connector	M12
Cable	PVC
Cable length	0,8 m

## A126305Q320511

Q32





CE


RoHS

UK  
CA

### Dimensions :

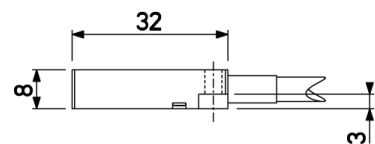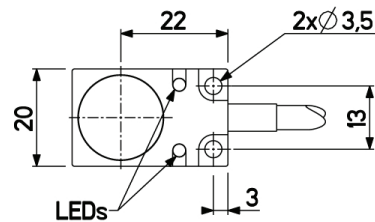

### Connection diagram :



### Pin assignment :

