

Technical data :

Rated operating distance (Sn)	1,5 mm
Mounting mode	Flush
Output type	PNP
Function	NO
Operating voltage	5...30V DC
Operating current	150 mA
No-load consumption	< 10 mA
Voltage drop	< 0,7V
Residual current	< 70 µA
Ambient temperature range	-25...70 °C
Hysteresis	3...15%
Switching frequency	1 kHz

Protection :

Reverse polarity protection	
IEC 61000-4-2 (ESD)	4kV Contact / 8kV Air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz...80MHz
Protection degree	IP67

Materials :

Housing	Brass, nickel-plated
Sensing face	PA

Connection :


Cable	PUR, halogen free (3 x 0,14 mm ²)
Cable length	2,5 m

A126350L060111L

L06,5



Dimensions :

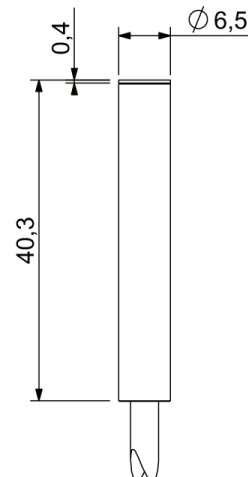

Connection diagram :

