

Technical data :

| | |
|---|-------------|
| Rated operating distance (Sn) | 7 mm (*) |
| Mounting mode | Flush |
| * The nominal distance is reached when flush mounted in stainless steel bracket according to the detailed view. | |
| Output type | PNP |
| Function | NO |
| Operating voltage | 10...30V DC |
| Operating current | 100 mA |
| No-load consumption | < 10 mA |
| Voltage drop | < 2 V |
| Residual current | < 70 µA |
| Ambient temperature range | 0...85 °C |
| Hysteresis | 3...15 % |
| Repeatability | < 5 % |
| Switching frequency | 250 Hz |

Protection :

| | |
|------------------------------|------------------------|
| Reverse polarity protection | |
| Short-circuit protection | |
| Overload protection | |
| IEC 61000-4-2 (ESD) | 4 kV contact / 8kV air |
| IEC 61000-4-4 (Burst) | 2kV / 5kHz |
| IEC 61000-4-6 (RF conducted) | 3V 150kHz...80MHz |
| Class II insulation | |
| Protection degree | IP67 |

Materials :

| | |
|--------------|--------------------|
| Housing | Steel, PTFE coated |
| Sensing face | Ceramic |

Status indication :

| | |
|--------|------------|
| Output | Yellow LED |
|--------|------------|

Connection :

| | |
|-----------|-----|
| Connector | M12 |
|-----------|-----|


A1263E00M180771C

M18




Dimensions :

Details view (mounting mode) :

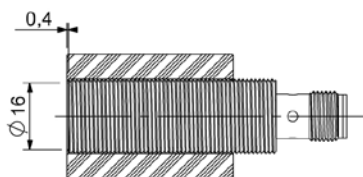

Connection diagram :



Pin assignment :

