A1263S1Q261521W

Q26

Technical data :	
Rated operating distance (Sn)	15 mm
Mounting mode	Flush
Output type	PNP
Function	NO
Operating voltage	10…30 V DC
Operating current	200 mA
No-load consumption	< 10 mA
Voltage drop	< 2 V
Residual current	< 70 µA
Ambient temperature range	-25...70 °C
Hysteresis	3...15 %
Repeatability	< 5 %
Switching frequency	150 Hz
Protection :	
Reverse polarity protection	
Short-circuit protection	
Overload protection	
IEC 61000-4-2 (ESD)	4 kV contact / 8kV air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz…80MHz
Class II insulation	
Protection degree	IP67/IP68 (*)
Materials :	
Housing	PA
Sensing face	PA
Status indication :	
Output	Yellow LED
Connection :	
Connector	M12
Cable	PUR
Cable length	0,1 m
Accessories (included):	
1 Q26 zamak holder	
1 zinc-plated steel screw CHC M4-30 mm	
1 zinc-plated steel screw CHC M4-8 mm	
1 zinc-plated steel screw CHC M4-6 mm	
Remarks :	
(*) IP68 : For more details, please enquire	

CE RoHS

Dimensions :

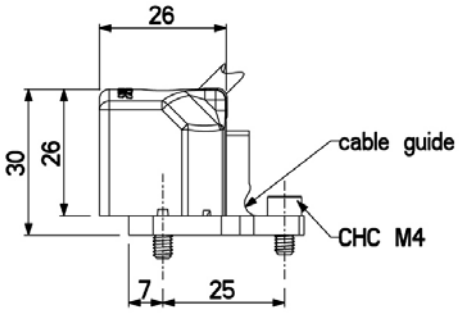

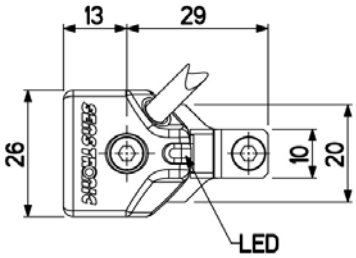

Connection diagram :



Pin assignment :

For uses in particularly harsh environments: Please enquire
We reserve the right to modify all or part of characteristics of our products withoutt warning.

Printed on: 24 févr. 2015