

Technical data :

Rated operating distance (Sn)	40 mm
Mounting mode	Non-Flush (*)
(*) Mounting according to details view below	
Output type	PNP
Function	NO/NC
Operating voltage	10...30 V DC
Operating current	200 mA
No-load consumption	< 20 mA
Voltage drop	< 2 V
Residual current	< 70 µA
Ambient temperature range	10...60 °C
Hysteresis	2...15 %
Repeatability	< 5 %
Switching frequency	50 Hz

Protection :

Reverse polarity protection	
Short-circuit protection	
Overload protection	
IEC 61000-4-2 (ESD)	4kV Contact / 8kV Air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz...80MHz
Class II insulation	
Protection degree	IP67

Materials :

Housing	PA
Connector	Brass, nickel-plated
Sensing face	PA

Status indication :

Power	Green LED
Output	Yellow LED


Connection :

Connector	M12
-----------	-----


Accessories (included) :

- 1 Q40 zamak holder
- 1 zinc-plated steel screw CHC M4-40 mm
- 1 stainless steel spring washer, Type S


Details view (Fixing) :

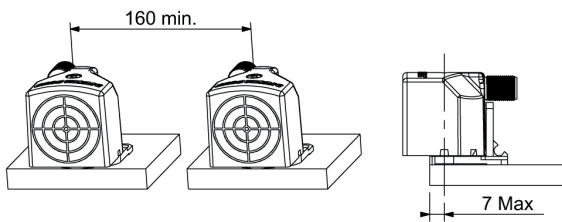

Connection diagram :



Pin assignment :



A1284L1Q404022

Q40



Dimensions :

