A1292S1Q261521

Q26

Technical data :	
Rated operating distance (Sn)	15 mm
Mounting mode	Flush
Function	NC
Operating voltage	10...55 V DC
Operating current	1,5...200 mA
Voltage drop	< 5 V
Residual current	< 600 µA
Ambient temperature range	-25...70 °C
Hysteresis	3...15 %
Repeatability	< 5 %
Switching frequency	100 Hz
Protection :	
Non-polarised	
Short-circuit protection	
Overload protection	
IEC 61000-4-2 (ESD)	4 kV contact / 8kV air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz…80MHz
Class II insulation	
Protection degree	IP67
Materials :	
Housing	PA
Sensing face	PA
Status indication :	
Output	Yellow LED
Connection :	
Connector	M12
Cable	PUR
Cable length	0,8 m
Accessories (included) :	

1 Q26 zamak holder
1 zinc-plated steel screw CHC M4-30 mm
1 zinc-plated steel screw CHC M4-8 mm
1 zinc-plated steel screw CHC M4-6 mm

CE RoHS

Dimensions :

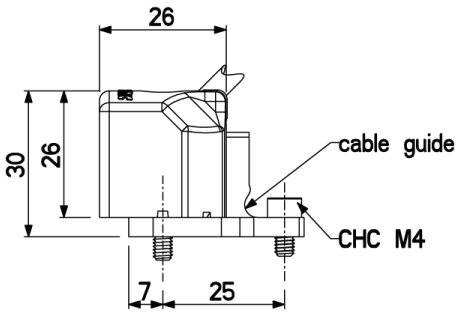

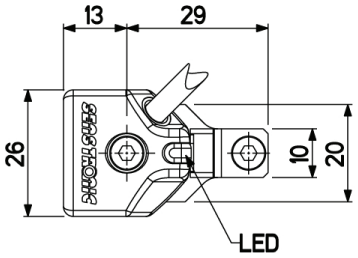

Connection diagram :



Pin assignment :

For uses in particularly harsh environments: Please enquire
We reserve the right to modify all or part of characteristics of our products without warning.

Printed on: 13 mars 2020