

Technical data :

Rated operating distance (Sn)	10 mm (*)
Mounting mode	Flush
(*) Front detection	
Function	NO
Operating voltage	20...250 V AC/DC (45...65 Hz)
Operating current	3...150 mA
Maximum overcurrent	2,2 A (10 ms / 3 Hz)
Voltage drop	< 6 V
Residual current	< 1,5 mA
Ambient temperature range	-25...70 °C
Hysteresis	3...15 %
Repeatability	< 5 %
Switching frequency	25 Hz AC / 100 Hz DC

Protection :

Non-polarised	
Class II insulation	
Protection degree	IP67

Materials :

Housing	PA
Sensing face	PA

Status indication :


Output	Yellow LED
--------	------------

Connection :



Connector	7/8
Cable	PUR
Cable length	0,2 m

A130202Q261021F


Q26

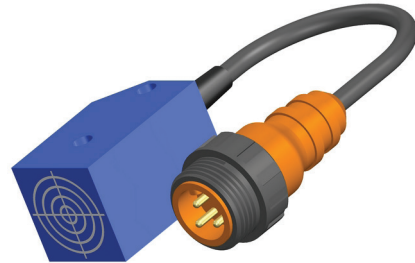

Dimensions :

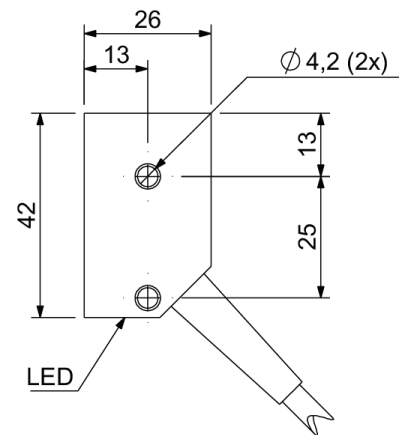

Connection diagram :



Pin assignment :

