



Technical data :	
Rated voltage	48 V DC
Rated current	6 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-30...80 °C
Protection :	
Protection degree	IP67
M23 straight male connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
M23 straight female connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	16 x Ø1 mm + 3 x Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Cable characteristics :	
Sheath material	PVC
Wire structure	12 x 0,50 mm ²
Conductor class	5
Sheath diameter	9 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Cable length :	
L length	30 m
Other length	On request
Accessories (included) :	
2 label holders	
1 cap (OBTM23)	

AD231219MLLIM305

Specific

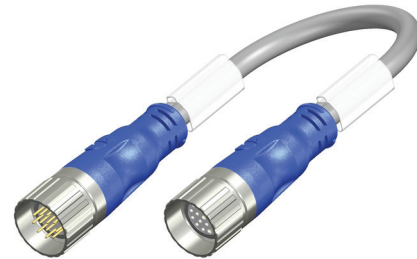

Dimensions :

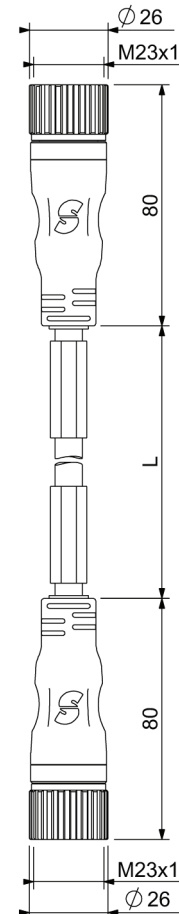

Wiring diagram :

