

Technical data :

Operating voltage	10...55 V DC
Operating current	200 mA
Ambient temperature range	-25...70 °C
Input type	Inputs compatible with PNP and 2-wire IPS (connection 1/2 or 1/4) with residual current < 600µA
Input current	< 7 mA

Protection :


Reverse polarity protection	
IEC 61000-4-2 (ESD)	4kV Contact / 8kV Air
IEC 61000-4-4 (Burst)	2kV / 5kHz
IEC 61000-4-6 (RF conducted)	3V 150kHz...80MHz
Protection degree	IP67

Materials :


Housing	Brass, nickel-plated
---------	----------------------

Connection :

Connector	M12
Cable	PVC
Cable length	0,2 m (0/+20 mm)

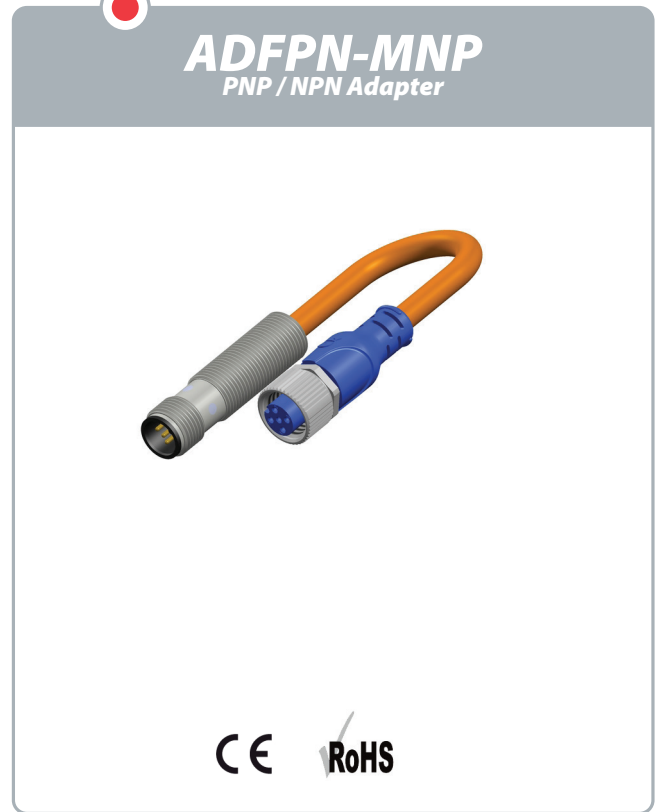

Dimensions :

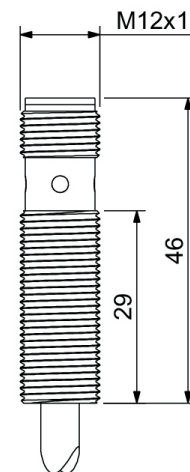

Connection diagram :

