

**Technical data :**

Rated operating distance (Sn)	10 mm
Mounting mode	Flush
Output type	PNP
Function	NC
Operating voltage	10...30V DC
Operating current	200 mA
No-load consumption	< 10 mA
Voltage drop	< 2 V
Residual current	< 70 µA
Ambient temperature range	-25...70 °C
Hysteresis	3...15 %
Repeatability	< 5 %
Switching frequency	100 Hz

**Protection :**

Reverse polarity protection	
Short-circuit protection	
Overload protection	
IEC 61000-4-2 (ESD)	4 kV contact / 8kV air
IEC 61000-4-4 (Burst)	2kV / 5kHz
Protection degree	IP67

**Materials :**

Housing	Stainless steel
Sensing face	PA

**Status indication :**

Output	Yellow LED
--------	------------

**Connection :**

Cable	PVC (3x0,25mm <sup>2</sup> )
Cable length	2 m

**Accessories (included) :**


2 stainless steel fixing nuts

## B127350M301031

M30



**Dimensions :**

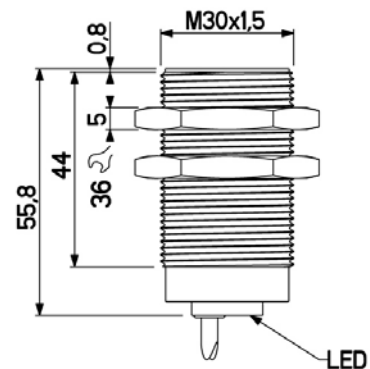

**Connection diagram :**

