

**Technical data :**

Rated voltage	30 V DC
Rated current	4 A
Ambient temperature range	-25...70 °C

**Protection :**

Protection degree	IP67
-------------------	------

**Right female DEUTSCH connector :**

Locking nut/screw material	Aluminium
Contact diameter	42 x Ø1 mm + 5 x Ø1,55 mm
Contact material	Nickel-plated contacts
Hood material	Aluminium

**Cable characteristics :**

Sheath material	PVC
Wire structure	52 G 0,50 mm <sup>2</sup>
Conductor class	5
Sheath diameter	17,3 mm
Flame resistance according to	IEC 60332-1-2
Oil resistance according to	EN 50290-2-22

**Cable length :**

L length	0,10 m (0/+20 mm)
Other length	On request

**Notes :**


\*X\* : Red marking, alignment with the main countersink key (aligned with contact #34)

## D47DL00105W1


Press tools



**Dimensions :**

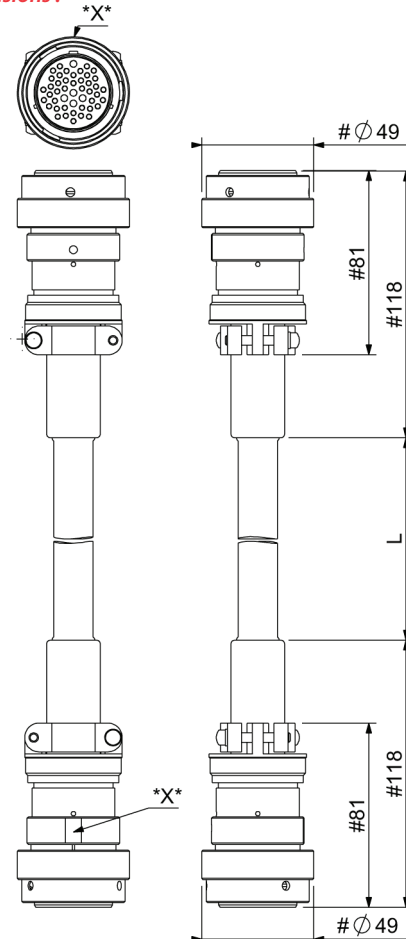

**Wiring diagram :**

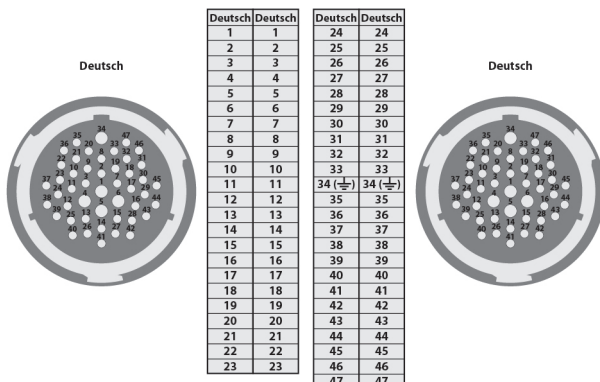

For uses in particularly harsh environments: Please enquire

We reserve the right to modify all or part of characteristics of our products without warning.

SENSTRONIC S.A.S. • 22 rue des Rustauds, 67700 MONSWILLER • Tel. +33 (0)3 88 71 26 33 • e-mail : contact@senstronic.com

Printed on:

27 nov. 2022