



Technical data :	
Rated voltage	30 V DC
Rated current	4 A
Ambient temperature range	-25...70 °C
Protection :	
Protection degree	IP65
Male HARTING receptacle :	
Receptacle material	Metal
Contact diameter	46 x Ø2,5 mm
Contact material	Silver-plated contacts
Right female DEUTSCH connector :	
Locking nut/screw material	Aluminium
Contact diameter	42 x Ø1 mm + 5 x Ø1,55 mm
Contact material	Nickel-plated contacts
Hood material	Aluminium
Cable characteristics :	
Sheath material	PVC
Wire structure	52 G 0,50 mm ²
Conductor class	5
Sheath diameter	17,3 mm
Flame resistance according to	IEC 60332-1-2
Oil resistance according to	EN 50290-2-22
Cable length :	
L length	0,70 m (0/+20 mm)
Other length	On request

H46D47MCL00705W1

Press tools

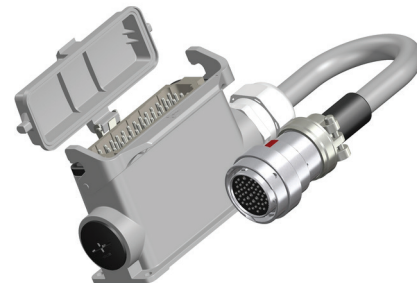

Dimensions :

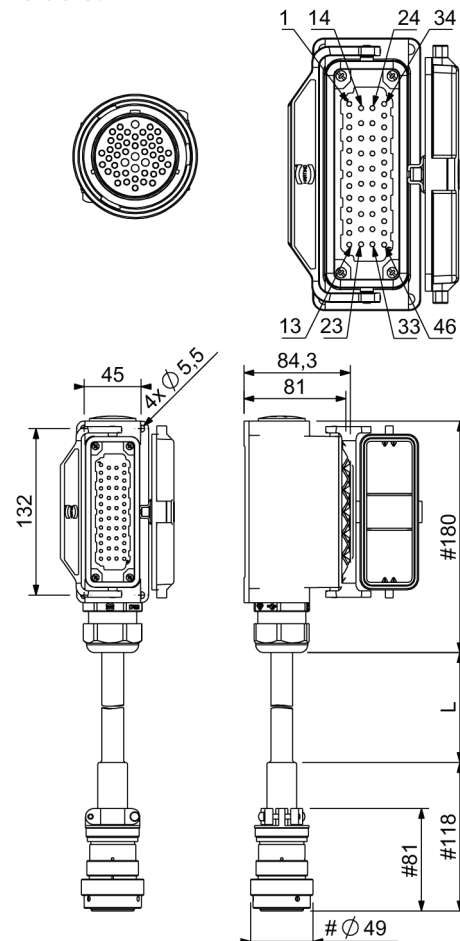

Wiring diagram :

