

**Technical data :**

Rated voltage	60 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C

**Protection :**

Protection degree	IP67 (M12)
-------------------	------------

**M12 straight male connector :**

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

**Female connector (D-Sub 9) :**

Locking nut/screw material	Locking screw : brass, nickel-plated
Contact material	Copper alloy, gold-plated
Contact resistance	< 10 mΩ
Hood material	Plastic, metal-plated
Rubber cable outlet sleeve	

**Cable characteristics :**

Sheath material	PVC
Wire structure	4 x 0,34 mm <sup>2</sup>
Conductor class	6
Sheath diameter	5 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	CNOMO E03.40.150.N

**Cable length :**

L length	1,8 m
Other length	On request

**Accessories (included) :**


1 label holder

## L12D9/3MLL0181

Specific



**Dimensions :**

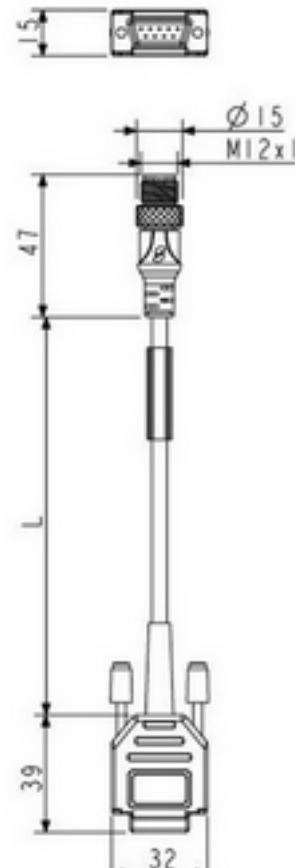

**Wiring diagram :**

