

Technical data :

Rated voltage	60 V DC
Rated current	9 A @ 40 °C
Insulation resistance	> 100 MΩ
Ambient temperature range	-25...70 °C

Protection :

Protection degree	IP67
-------------------	------

M12 straight male connector :

Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Fastening torque from 0,6 up to 1 Nm max. (hand-tight)	

7/8" female connector :

Locking nut/screw material	PA
Contact diameter	Ø1,98 mm
Contact material	CuZn, pre-silvered and gold-plated
Contact resistance	< 5 mΩ

Cable characteristics :

Sheath material	PVC
Wire structure	5 x 0,50 mm ²
Conductor class	5
Sheath diameter	6,8 mm

Cable length :


L length	1 m (+3/-6 cm)
Other length	On request

Accessories (included) :


2 label holders

L12L/578MLL15

Specific

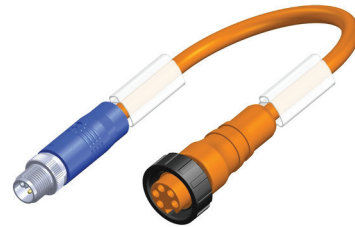

Dimensions :

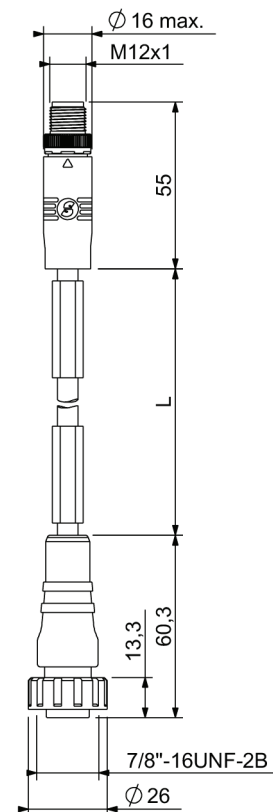

Wiring diagram :

