

Technical data :	
Rated voltage	48 V AC/DC
Rated current	16 A @ 40 °C
Insulation resistance	> 100 MΩ
Ambient temperature range	-25...70 °C

Protection :	
Protection degree	IP67


M12 straight male connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Fastening torque from 0,6 up to 1 Nm max. (hand-tight)	

M12 straight female connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Fastening torque from 0,6 up to 1 Nm max. (hand-tight)	


Cable characteristics :	
Sheath material	Halogen free PUR
Wire structure	5 x 1,50 mm ²
Conductor class	6
Sheath diameter	8,9 mm
Flame resistance according to	IEC 60332-1 / UL CSA FT1
Oil resistance according to	UL 758
Admissible torsion	+/- 180 °/m
Drag chain suitable	

Cable length :	
L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request
Référence : remplacer «...» par la longueur souhaitée : 1/2/5/10	

Accessories (included) :	
2 label holders	

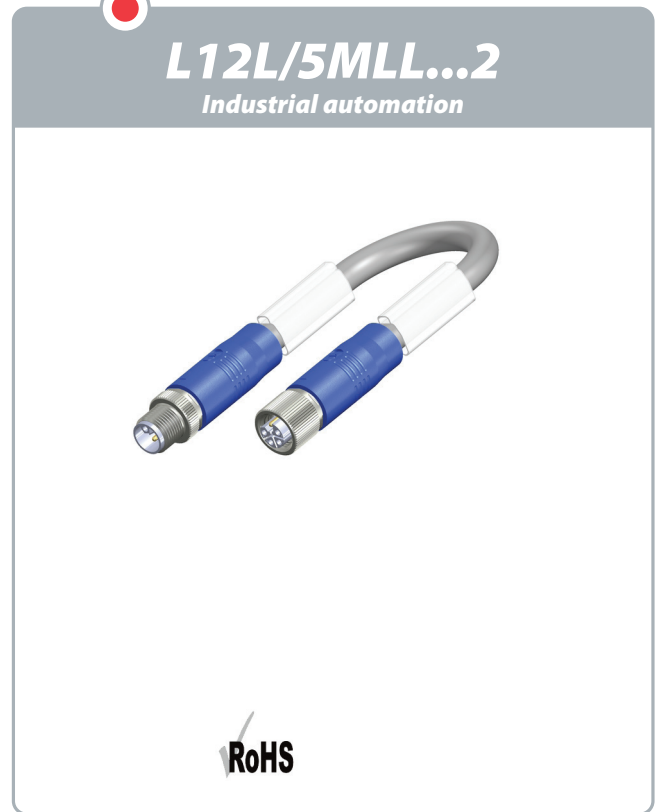

Dimensions :

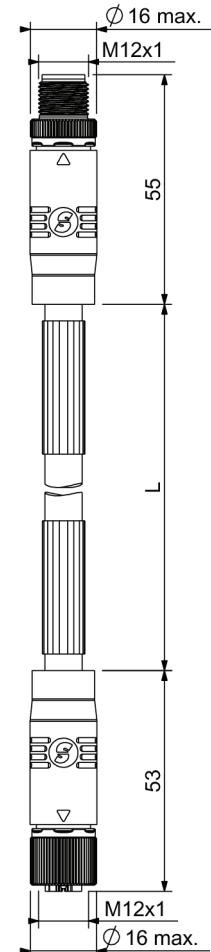

Wiring diagram :

