

Technical data :

Rated voltage	60 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-30...80 °C

Protection :

Protection degree	IP67
-------------------	------

M12 female receptacle :

Mounting type	External screwing
Receptacle material	CuZn, nickel-plated
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Wire characteristics :

Sheath material	PVC
Wire structure	AWG18
Conductor class	28 x 0,20 mm
Sheath diameter	2,9 mm
Flame resistance according to	UL VW-1

Cable length :

L length	0,15 m
Other length	On request

Notes :



UL potting
O-ring : (13,5 x 1,5 - FKM - 80 Sh)

L12/4EE00155AW

Industrial automation



Dimensions :

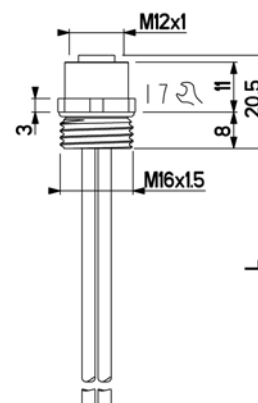

Wiring diagram :

