

### Technical data :

Rated voltage	60 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C

### Protection :

Protection degree	IP65
-------------------	------

### M12 straight male connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

### M12 angled female connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

### Shielded cable characteristics :

Sheath material	PVC
Wire structure	4 x 0,34 mm <sup>2</sup>
Conductor class	5
Sheath diameter	5,5 mm
Tin-plated copper braided shielding covering rate: 85%	
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)

### Cable protection characteristics :

Aramid fiber (kevlar) braided sleeving	
Max. contact temperature	+250°C (peak +330°C)
Max. sleeving length = 5 m	

### Cable length :

L length	0,3 m
Other length	On request (max. sleeving length = 5 m)

### Accessories (included) :

2 label holders


## L12/4MLC0035BTK

Welding environment



RoHS

### Dimensions :

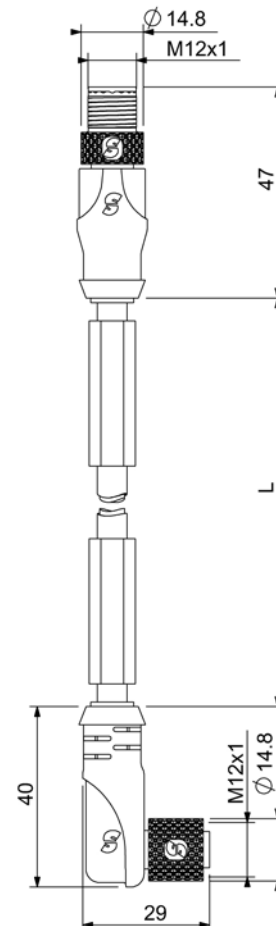

### Wiring diagram :

