


| Technical data : | |
|----------------------------------------------------|----------------------------------------------|
| Rated voltage | 48 V AC/DC |
| Rated current | 4 A |
| Insulation resistance | > 1000 MΩ |
| Ambient temperature range | -25...70 °C |
| Protection : | |
| Protection degree | IP65 |
| M12 straight male connector : | |
| Locking nut/screw material | Zamak, nickel-plated |
| Overmoulding material | TPU, self-extinguishing |
| Contact diameter | Ø1 mm |
| Contact material | CuZn, pre-plated with nickel and gold-plated |
| Contact resistance | < 5 mΩ |
| M12 straight female connector : | |
| Locking nut/screw material | Zamak, nickel-plated |
| Overmoulding material | TPU, self-extinguishing |
| Contact diameter | Ø1 mm |
| Contact material | CuZn, pre-plated with nickel and gold-plated |
| Contact resistance | < 5 mΩ |
| Cable characteristics : | |
| Sheath material | PVC |
| Wire structure | 4 x 0,34 mm ² |
| Conductor class | 6 |
| Sheath diameter | 5 mm |
| Flame resistance according to | IEC 60332-1 (VDE 0472-804/B) |
| Cable protection characteristics : | |
| Silicone rubber-coated fiberglass braided sleeving | |
| Max. contact temperature | +250°C (peak +290°C) |
| Cable length : | |
| L length | 1 m |
| Accessories (included) : | |
| 2 label holders | |



Dimensions :

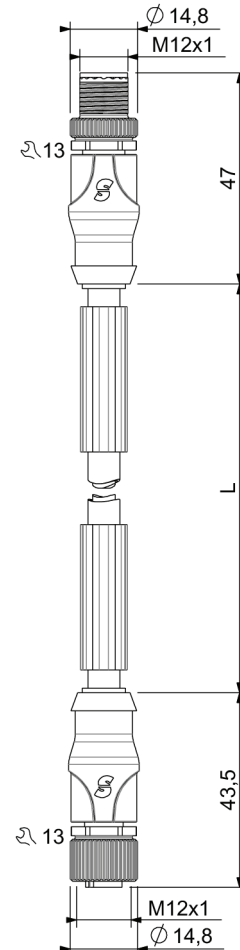

Wiring diagram :

