



Technical data :	
Rated voltage	48 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C
Protection :	
Protection degree	IP67
M12 straight male connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
M12 straight female connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Spiral cable characteristics :	
Sheath material	PUR
Wire structure	4 x 0,25 mm ²
Sheath diameter	4,5 mm
Cable length :	
Initiale length (Lrepos,Lo)	0,4 m
Extension length (Lmax)	2 m
Other length	On request
Accessories (included) :	
2 label holders	

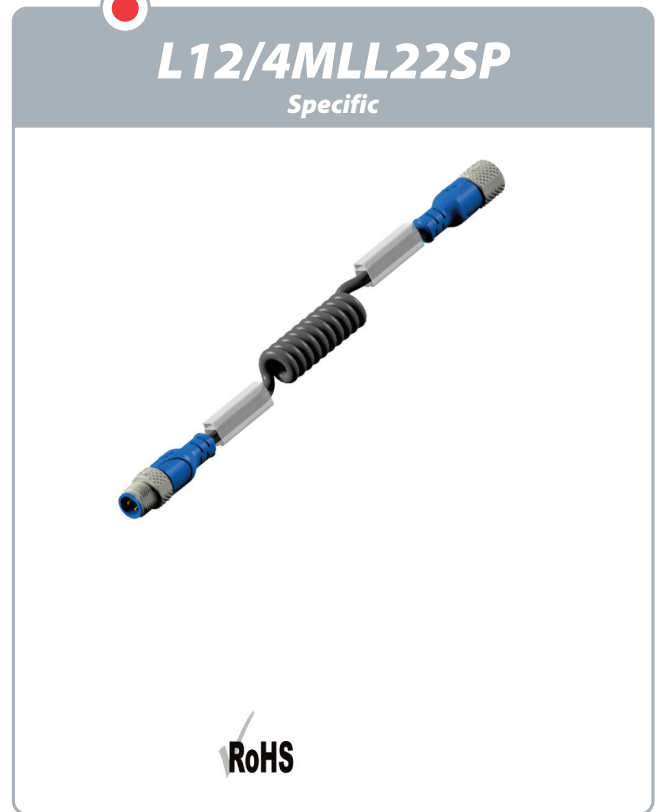

Dimensions :

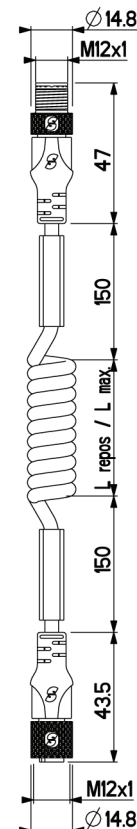

Wiring diagram :

