

Technical data :	
Rated voltage	24 V AC/DC
Rated current	4 A
Ambient temperature range	-25...80 °C

Protection :	
Protection degree	IP67

M12 straight male connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Pressure switch connector:	
Contact material	CuZn, Cu/Ni ,Sn
Contact resistance	< 5 mΩ
LED(s) colour	LEDs (YE / GN)

Status indication :	
Signal 3 (BK)	Yellow LED
Signal 2 (WH)	Green LED

Cable characteristics :	
Cable material	Halogen free PUR
Wire structure	5 G 0,50 mm ²
Cable diameter	5,4 mm

Cable length :	
L length	3 m
Other length	On request


Accessories (included) :	
1 captive screw on the solenoid valve connector	
1 sticker on the solenoid valve connector	
1 label holder	

L12/5LAE32

Industrial automation



Dimensions :

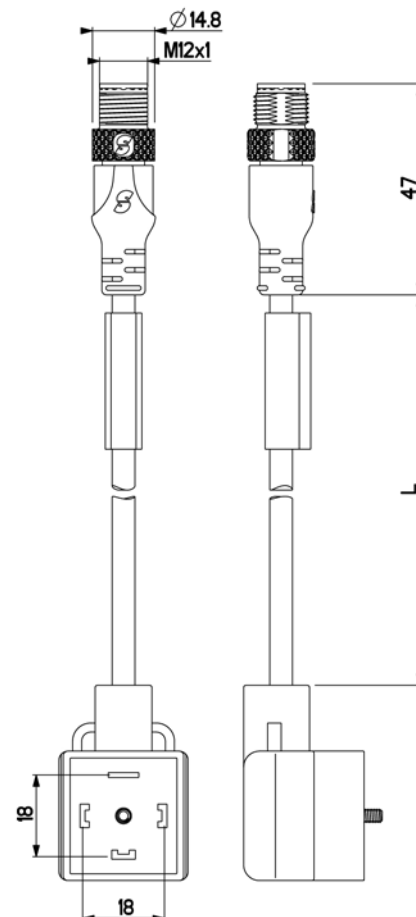

Wiring diagram :

