

Technical data :

Rated voltage	32 V DC
Rated current	4 A
Ambient temperature range	-25...80 °C

Protection :

Protection degree	IP67
-------------------	------

M12 straight male connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Pressure switch connector:

Contact material	CuZn, Cu/Ni ,Sn
Contact resistance	< 5 mΩ
LED(s) colour	LEDs (YE / GN)

Status indication :

Signal 3 (BK)	Yellow LED
Pin signal 1 (BN)	Green LED

Cable characteristics :

Cable material	Halogen free PUR
Wire structure	5 G 0,50 mm ²
Cable diameter	5,4 mm

Cable length :


L length	2 m (+/- 3 cm)
Other length	On request

Accessories (included) :


- 1 captive screw on the solenoid valve connector
- 1 sticker on the solenoid valve connector
- 1 label holder

L12/5LAEA22

Industrial automation



Dimensions :

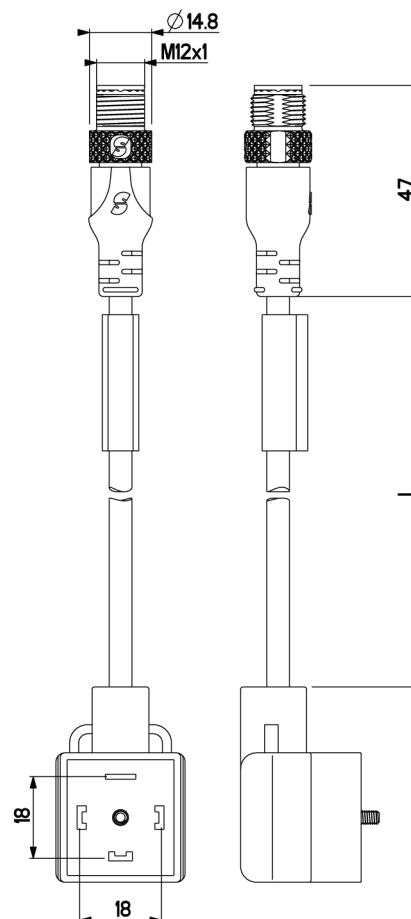

Wiring diagram :

