

Technical data :

| | |
|---------------------------|-------------|
| Rated voltage | 24 V AC/DC |
| Rated current | 4 A |
| Ambient temperature range | -25...80 °C |

Protection :

| | |
|-------------------|------|
| Protection degree | IP67 |
|-------------------|------|

M12 straight male connector :

| | |
|----------------------------|--|
| Locking nut/screw material | Zamak, nickel-plated |
| Overmoulding material | TPU, self-extinguishing |
| Contact diameter | Ø1 mm |
| Contact material | CuZn, pre-plated with nickel and gold-plated |
| Contact resistance | < 5 mΩ |

Solenoid valve connector (Form C Industrial) :

| | |
|-------------------------------------|----------------|
| Contact centre distance | 9,4 mm |
| Contact material | CuZn, Cu/Ni Sn |
| Contact resistance | < 5 mΩ |
| Integrated interference suppression | Varistor |
| LED(s) colour | Yellow LED |

Status indication :

| | |
|--------|------------|
| Signal | Yellow LED |
|--------|------------|

Cable characteristics :


| | |
|----------------|--------------------------|
| Cable material | PVC |
| Wire structure | 3 G 0,50 mm ² |
| Cable diameter | 5 mm |

Cable length :


| | |
|--------------|------------|
| L length | 1 m |
| Other length | On request |

Accessories (included) :

- 1 captive screw on the solenoid valve connector
- 1 sticker on the solenoid valve connector
- 1 label holder

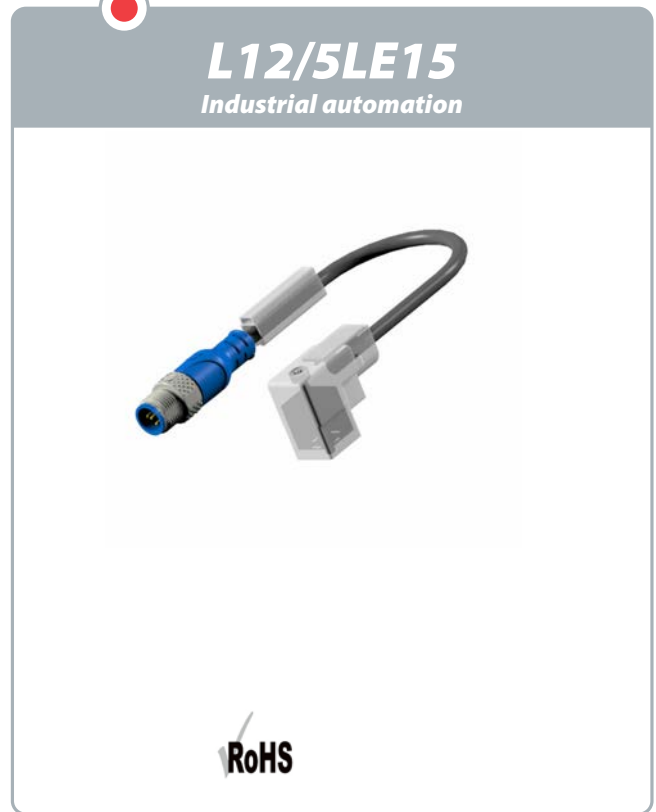

Dimensions :

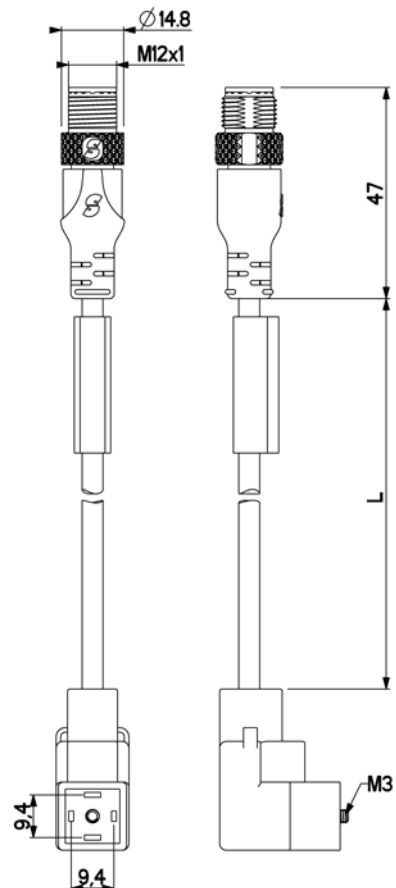

Wiring diagram :

