



## L12/5LED15

Industrial automation

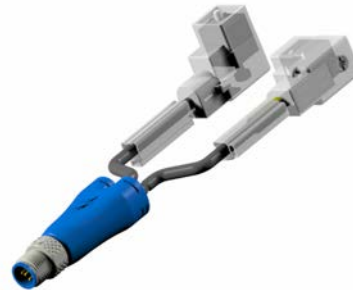

Technical data :	
Rated voltage	24 V AC/DC
Rated current	4 A
Ambient temperature range	-25...80 °C
Protection :	
Protection degree	IP67
M12 male Y connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Solenoid valve connector (Form C Industrial) :	
Contact centre distance	9,4 mm
Contact material	CuZn, Cu/Ni Sn
Contact resistance	< 5 mΩ
Integrated interference suppression	Varistor
LED(s) colour	Yellow LED
Status indication :	
Signal	Yellow LED
Cable characteristics :	
Cable material	PVC
Wire structure	3 G 0,50 mm <sup>2</sup>
Cable diameter	5 mm
Cable length :	
L length	1 m
Other length	On request
Accessories (included) :	
1 captive screw on the solenoid valve connector	
1 sticker on the solenoid valve connector	
2 label holders	
Notes :	
*X* : Coloured marker	

**Dimensions :**

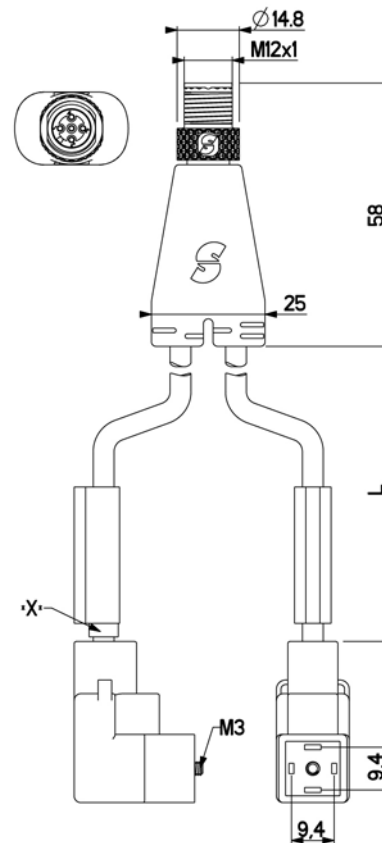

**Wiring diagram :**

