

Technical data :

Rated voltage	24 V AC/DC
Rated current	4 A
Ambient temperature range	-25...80 °C

Protection :

Protection degree	IP67
-------------------	------

M12 straight male connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Solenoid valve connector (Form C Industrial) :

Contact centre distance	9,4 mm
Contact material	CuZn, Cu/Ni Sn
Contact resistance	< 5 mΩ
Integrated interference suppression	Varistor
LED(s) colour	Yellow LED

Status indication :

Signal	Yellow LED
--------	------------

Cable characteristics :

Cable material	PVC
Wire structure	3 G 0,50 mm ²
Cable diameter	5 mm

Cable length :

L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request

Reference : replace «...» by length required: 1/2/5/10

Accessories (included) :


- 1 captive screw on the solenoid valve connector
- 1 sticker on the solenoid valve connector
- 1 label holder

L12/5LE...5

Industrial automation



Dimensions :

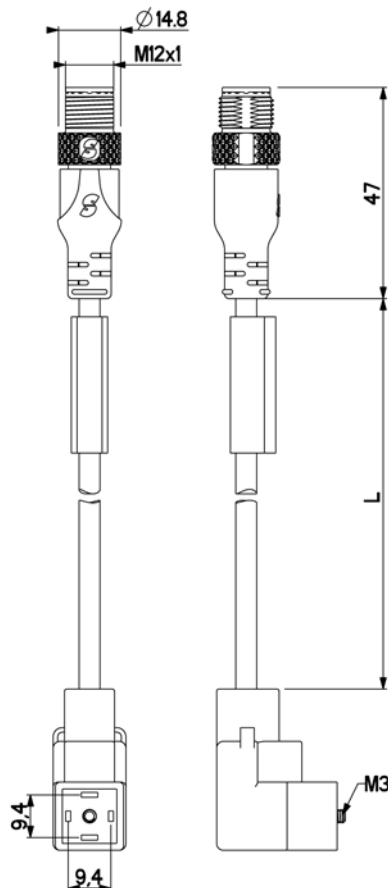

Wiring diagram :

