


Technical data :	
Rated voltage	30 V AC/DC
Rated current	2 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-30...80 °C
Protection :	
Protection degree	IP67
M12 female receptacle :	
Mounting type	External screwing
Receptacle material	CuZn, nickel-plated
Contact diameter	Ø0,8 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Wire characteristics :	
Sheath material	PVC (UL Style 1007/1569)
Wire structure	AWG 24-0,22 mm ²
Conductor class	7x AWG32 (7 x 0,20mm)
Sheath diameter	1,50 mm
Flame resistance according to	UL 1581 VW-1 ; CSA FT-1
Cable length :	
L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request
Reference : replace «...» by length required: 1/2/5/10	
Accessories (included) :	
1 PG9 nut, nickel plated	

L12/8EE...5C

Industrial automation



Dimensions :

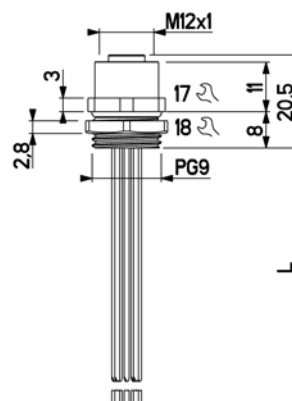

Wiring diagram :

