

Technical data :

Rated voltage	30 V DC
Rated current	2 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...90 °C

Protection :

Protection degree	IP67
-------------------	------


M12 straight male connector :

Locking nut/screw material	CuZn, nickel-plated
Contact diameter	Ø0,8 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Connection type	Screw connection (max. 0,75 mm ²)
Hood material	PBT (UL94HB)
Cable gland	4...8 mm (SW19)

L12/8LM01
 Industrial automation



Dimensions :

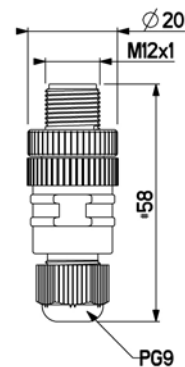

Pin assignment :

