

Technical data :

Rated voltage	60 V DC
Rated current	9 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-40...90 °C

Protection :

Protection degree	IP67
-------------------	------

M23 straight male connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø2 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

7/8" female connector :

Locking nut/screw material	PA
Contact diameter	Ø1,98 mm
Contact material	CuZn, pre-silvered and gold-plated
Contact resistance	< 5 mΩ

Cable characteristics :

Sheath material	PVC
Wire structure	5 x 0,50 mm ²
Conductor class	5
Sheath diameter	6,8 mm

Cable length :


L length	1 m
Other length	On request

Accessories (included) :


2 label holders

L230678MLLIM015W2

Specific

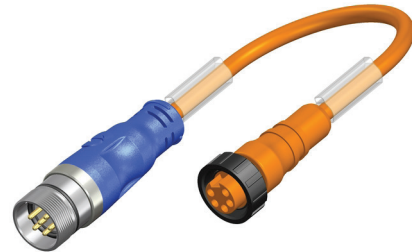

Dimensions :

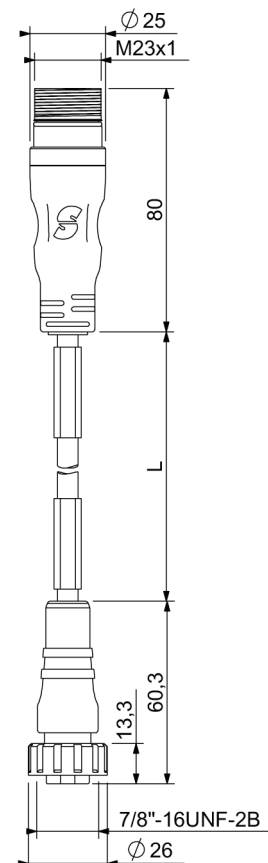

Wiring diagram :

