


Technical data :	
Rated voltage	60 V DC
Rated current	9 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-40...90 °C
Protection :	
Protection degree	IP67
M23 straight male connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø2 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
7/8" female connector :	
Locking nut/screw material	PA
Contact diameter	Ø1,98 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Cable characteristics :	
Sheath material	PVC
Wire structure	5 x 0,50 mm ²
Conductor class	5
Sheath diameter	6,8 mm
Cable length :	
L length	1 m
Other length	On request
Accessories (included) :	
2 label holders	
Accessories (not included) :	
L78/5MLLDSPÉ1	

L230678MLLIM015

Specific



Dimensions :

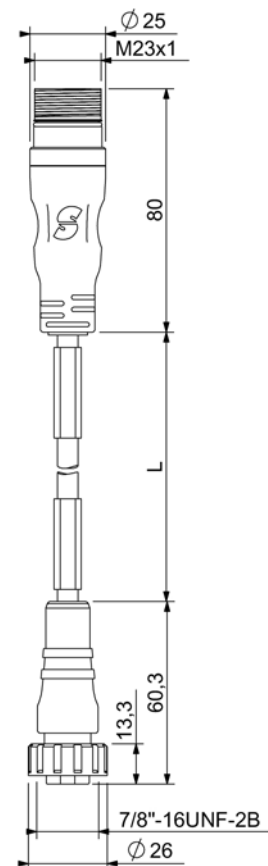

Wiring diagram :

