

Technical data :	
Rated voltage	60 V DC
Rated current	16 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-40...80 °C

Protection :	
Protection degree	IP67

M23 straight male connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø2 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

M23 straight female connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø2 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Cable characteristics :	
Sheath material	PVC
Wire structure	3 G 1,50 mm <sup>2</sup>
Conductor class	5
Sheath diameter	6,7 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	EN 50363 & IEC 60811-2-1

Cable length :	
L length	2 m
Other length	On request


Accessories (included) :	
2 label holders	

## L2306MLL025

Industrial automation



Dimensions :

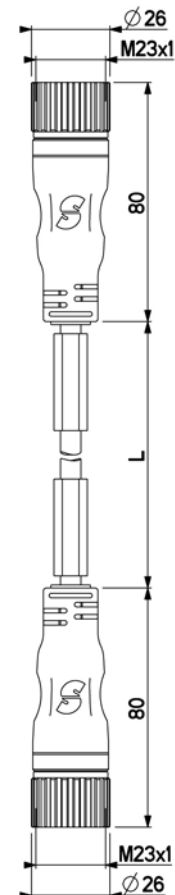

Wiring diagram :

