


<b>Technical data :</b>	
Rated voltage	60 V DC
Rated current	16 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-40...80 °C
<b>Protection :</b>	
Protection degree	IP67
<b>M23 straight male connector :</b>	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø2 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
<b>M23 straight female connector :</b>	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø2 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
<b>Cable characteristics :</b>	
Sheath material	PVC
Wire structure	3 G 1,50 mm <sup>2</sup>
Conductor class	5
Sheath diameter	6,7 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	EN 50363 & IEC 60811-2-1
<b>Cable length :</b>	
L length	25 m
Other length	On request
<b>Accessories (included) :</b>	
2 label holders	



**Dimensions :**

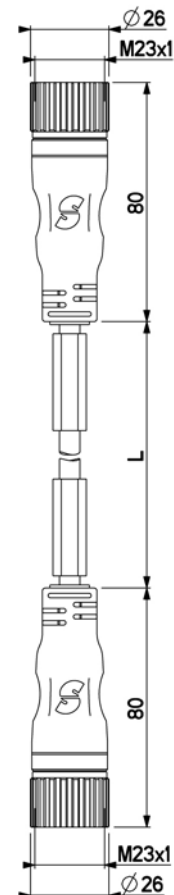

**Wiring diagram :**

