

Technical data :

Rated voltage	48 V DC
Rated current	8 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-30...80 °C

Protection :

Protection degree	IP67
-------------------	------

M23 male receptacle :

Mounting type	Internal screwing
Receptacle material	CuZn, nickel-plated
Locking nut/screw material	Zamak, nickel-plated
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Cable characteristics :

Sheath material	PVC
Wire structure	12 x 0,50 mm ²
Conductor class	5
Sheath diameter	9 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)


Cable length :

L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request



Reference : replace «...» by length required: 01/02/05/10

Accessories (included) :

- 4 screws M3-10mm, DIN84, ISO1207
- 1 flat seal (NBR)

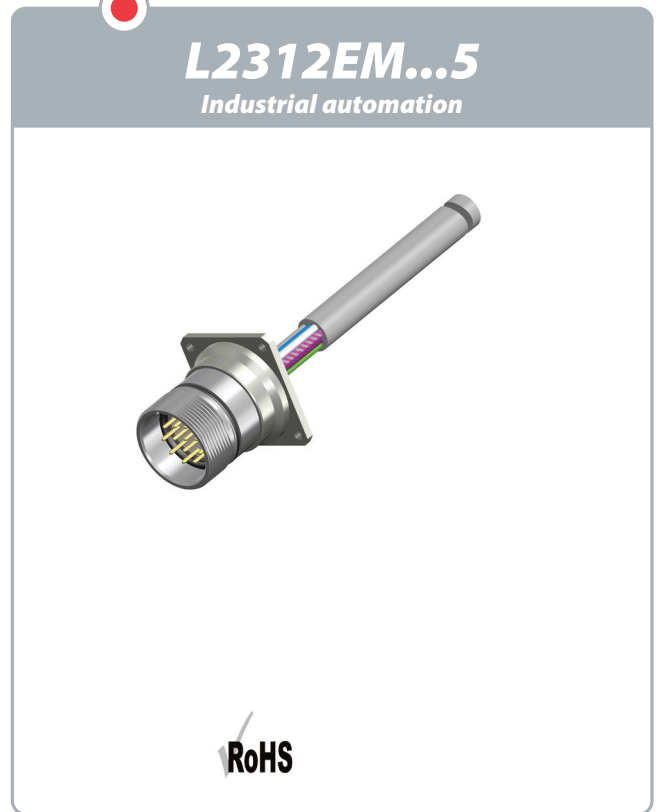

Dimensions :

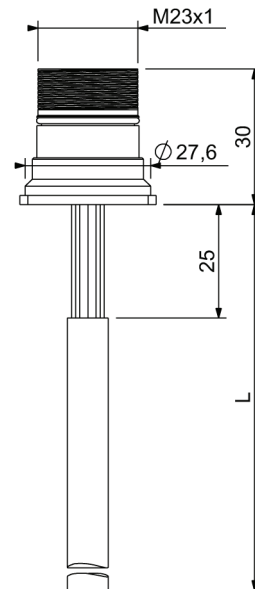

Wiring diagram :

