

Technical data :

Rated voltage	60 V DC
Rated current	6 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-40...80 °C

Protection :

Protection degree	IP67
-------------------	------

M23 straight male connector :

Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Cable characteristics :

Sheath material	PVC
Wire structure	12 G 0,50 mm ²
Conductor class	5
Sheath diameter	8,9 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	Good oil resistance

Cable length :

L length	7 m
Other length	On request

Accessories (included) :


1 label holder
1 cap (OBTM23)

L2312LMI071

Industrial automation



Dimensions :

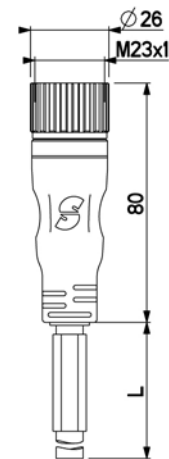

Wiring diagram :

