

Technical data :		
Rated voltage		48 V DC
Rated current	6 A (Ø1mm) / 10 A (Ø1,5mm)	
Insulation resistance		> 100 MΩ
Ambient temperature range		-40...90 °C

Protection :	
Protection degree	IP67

M23 male receptacle :	
Mounting type	External screwing
Receptacle material	CuZn, nickel-plated
Locking nut/screw material	Zamak, nickel-plated
Contact diameter	16 x Ø1 mm + 3 x Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Ground contact (N°12) connected to metal body of connector	

Cable characteristics for L > or = 2 m (*) :	
Sheath material	Halogen free PUR
Wire structure	3 G 1 mm ² + 16 x 0,34 mm ²
Conductor class	6
Sheath diameter	10,9 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	EN 50363 & IEC 60811-2-1 & CNOMO

Cable length :	
L standard lengths	2 m / 5 m / 10 m
Other length	On request
Reference : replace «...» by length required: 02/05/10	

Accessories (included) :	
4 screws M3-10mm, DIN84, ISO1207	
4 nuts M3, DIN934, ISO4032	
4 lock washers, DIN 7698	
1 flat seal (NBR)	


(*) Remark for L < 2 m :	
PVC wire strand (cable without external sheath)	

L2319EME...5

Industrial automation



Dimensions :

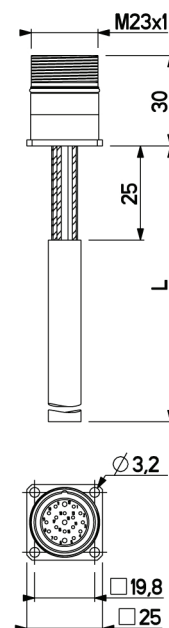

Wiring diagram :

