


L2319JC1



Technical data :	
Rated voltage	60 V DC
Rated current	6 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-40...90 °C
Protection :	
Protection degree	IP67/IP65
M23 angled female connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	16 x Ø1 mm + 3 x Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Ground contact (N°12) connected to metal body of connector	
Connector (Souriau) :	
Contact diameter	Ø1 mm
Contact material	Copper alloy, gold-plated
Connection type	Soldered connection
Hood material	Aluminium, olive green cadmium-plated
Cable characteristics :	
Sheath material	Halogen free PUR
Wire structure	3 G 1 mm ² + 16 x 0,34 mm ²
Conductor class	6
Sheath diameter	10,9 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	EN 50363 & IEC 60811-2-1 & CNOMO
Cable length :	
L length	2 m
Other length	On request
Accessories (included) :	
2 label holders	

Dimensions :

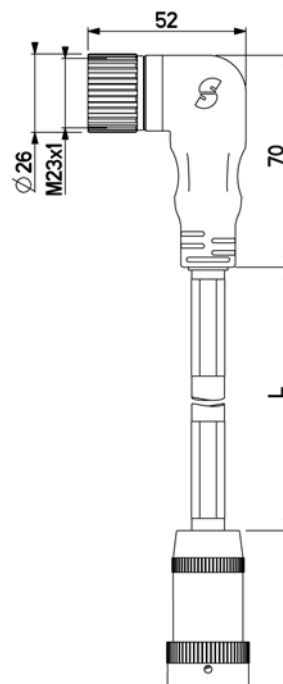

Wiring diagram :

