


Technical data :		
Rated voltage		60 V DC
Rated current	6 A (Ø1mm) / 10 A (Ø1,5mm)	
Insulation resistance		> 100 MΩ
Ambient temperature range		-40...90 °C
Protection :		
Protection degree		IP67
M23 straight male connector :		
Locking nut/screw material	Zamak, nickel-plated	
Overmoulding material	TPU, self-extinguishing	
Contact diameter	16 x Ø1 mm + 3 x Ø1,5 mm	
Contact material	CuZn, pre-plated with nickel and gold-plated	
Contact resistance	< 5 mΩ	
Ground contact (N°12) connected to metal body of connector		
Cable characteristics :		
Sheath material	Halogen free PUR	
Wire structure	3 G 1 mm ² + 16 x 0,34 mm ²	
Conductor class	6	
Sheath diameter	10,9 mm	
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)	
Oil resistance according to	EN 50363 & IEC 60811-2-1 & CNOMO	
Cable length :		
L length	40 m	
Other length	On request	
Accessories (included) :		
1 label holder		

L2319LM405

Oil environment



Dimensions :

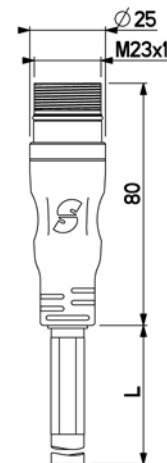

Wiring diagram :

