

Technical data :	
Rated voltage	60 V AC/DC
Rated current	4 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-25...70 °C

Protection :	
Protection degree	IP67

M23 straight male connector :	
Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	16 x Ø1 mm + 3 x Ø1,5 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

M12 straight female connector :	
Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Cable characteristics :	
Sheath material	PVC
Wire structure	4 x 0,34 mm <sup>2</sup>
Conductor class	6
Sheath diameter	5 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	CNOMO E03.40.150.N

Cable length :	
L length	2 m
Other length	On request

Accessories (included) :	
2 label holders	
1 cap (OBTM23)	


## L2319MLLI025RR

Specific



RoHS

### Dimensions :

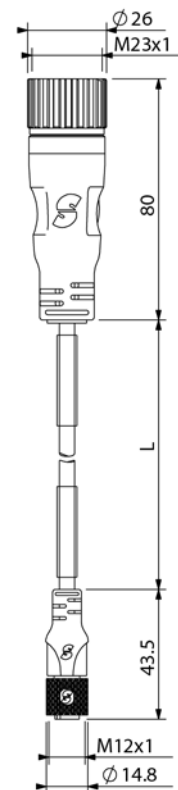

### Wiring diagram :

