

Technical data :

Rated voltage	30 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C

Protection :

Protection degree	IP67
-------------------	------

M8 female receptacle :

Receptacle material	CuZn, nickel-plated
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

Wire characteristics :

Sheath material	PVC
Wire structure	0,34 mm ²
Conductor class	5 (7 x 0,25 mm)
Sheath diameter	1,25 mm
Flame resistance according to	NFC 32-070/C1

Cable length :

L standard lengths	1 m / 2 m / 5 m / 10 m
Other length	On request


Reference : replace «...» by length required: 1/2/5/10

L8V/4EE...5

Industrial automation



Dimensions :

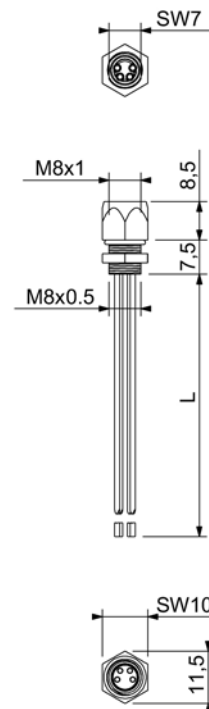

Wiring diagram :

