


| Technical data :               |  |
|--------------------------------|--|
| Rated voltage                  | 30 V AC/DC                                   |
| Rated current                  | 4 A  |
| Insulation resistance          | > 1000 MΩ                                    |
| Ambient temperature range      | -25...70 °C                                  |
| Protection :                   |  |
| Protection degree              | IP67   |
| M8 straight female connector : |  |
| Locking nut/screw material     | CuZn, nickel-plated                          |
| Overmoulding material          | TPU, self-extinguishing                      |
| Contact diameter               | Ø1 mm  |
| Contact material               | CuZn, pre-plated with nickel and gold-plated |
| Contact resistance             | < 5 mΩ                                       |
| Cable characteristics :        |  |
| Sheath material                | Halogen free PUR                             |
| Wire structure                 | 4 x 0,34 mm <sup>2</sup>                     |
| Conductor class                | 6  |
| Sheath diameter                | 5 mm   |
| Flame resistance according to  | IEC 60332-1 (VDE 0472-804/B)                 |
| Oil resistance according to    | EN 50363 & IEC 60811-2-1 & CNOMO             |
| Resistant to weld splatters    |  |
| Cable length :                 |  |
| L length                       | 0,3 m  |
| Other length                   | On request                                   |
| Accessories (included) :       |  |
| 1 label holder                 |  |



Dimensions :

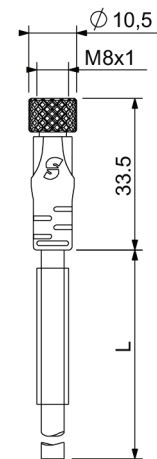

Wiring diagram :

