

M8
 Female

Technical data :


Rated voltage	30 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...80 °C

Protection :


Protection degree	IP67
-------------------	------

M8 straight female connector :

Locking nut/screw material	CuZn, nickel-plated
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Connection type	Soldered connection (max. 0,25 mm ²)
Hood material	PBT
Cable gland	3,5...5 mm

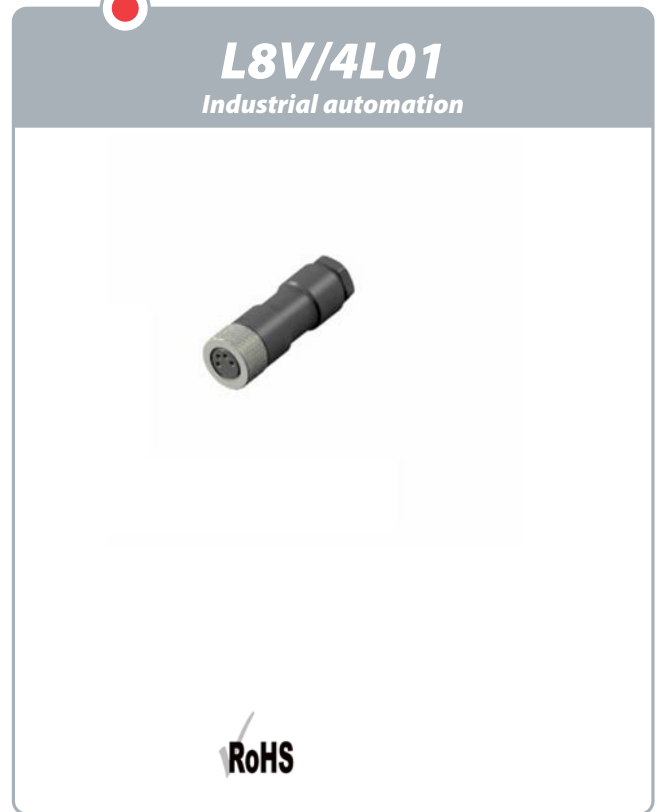

Dimensions :



Pin assignment :

