


Technical data :	
Rated voltage	24 V AC/DC
Rated current	4 A
Ambient temperature range	-25...80 °C
Protection :	
Protection degree	IP67
Pressure switch connector:	
Contact material	CuZn, Cu/Ni ,Sn
Contact resistance	< 5 mΩ
LED(s) colour	LEDs (YE / GN)
Status indication :	
Signal 3 (BK)	Yellow LED
Signal 2 (WH)	Green LED
Cable characteristics :	
Cable material	Halogen free PUR
Wire structure	5 G 0,50 mm ²
Cable diameter	5,4 mm
Cable length :	
L length	2 m
Other length	On request
Accessories (included) :	
1 label holder	

LAE24/3C22

Industrial automation



Dimensions :

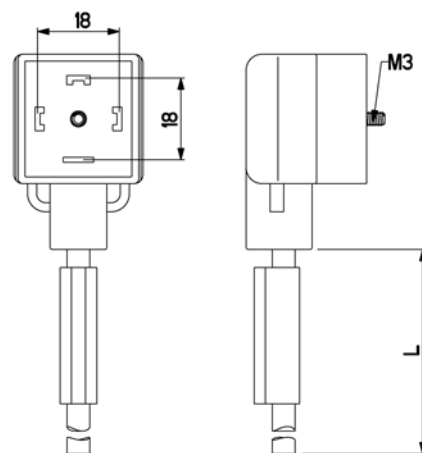

Wiring diagram :

