


<b>Technical data :</b>	
Rated voltage	24 V AC/DC
Rated current	4 A
Ambient temperature range	-25...80 °C
<b>Protection :</b>	
Protection degree	IP67
<b>Solenoid valve connector (DIN Form C) :</b>	
Contact centre distance	8 mm
Contact material	CuZn, Cu/Sn
Contact resistance	< 10 mΩ
Integrated interference suppression	Transil diode
LED(s) colour	Yellow LED
<b>Status indication :</b>	
Signal	Yellow LED
<b>Cable characteristics :</b>	
Cable material	Halogen free PUR
Wire structure	3 G 0,50 mm <sup>2</sup>
Cable diameter	4,6 mm
<b>Cable length :</b>	
L length	5 m
Other length	On request
<b>Accessories (included) :</b>	
1 captive screw on the solenoid valve connector	
1 sticker on the solenoid valve connector	
1 label holder	



**Dimensions :**

**Wiring diagram :**

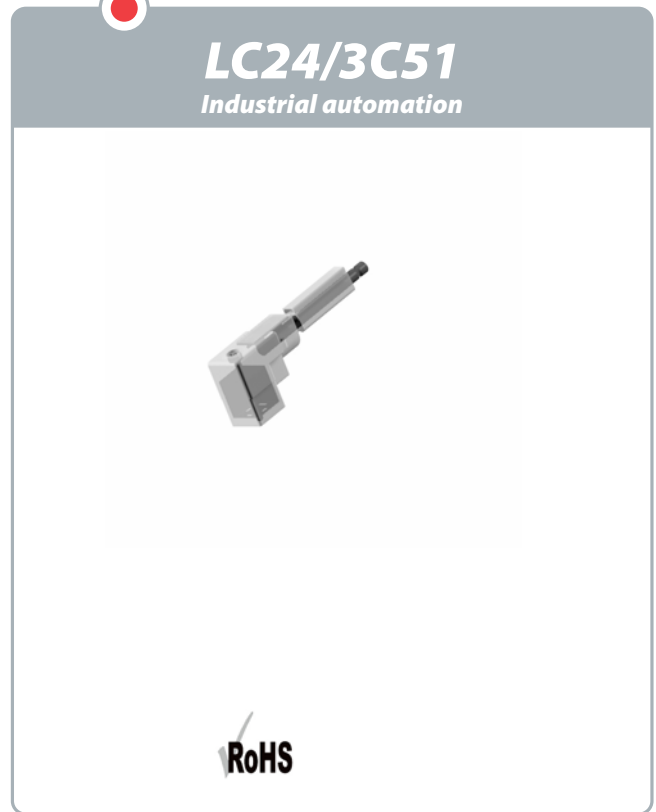