

Technical data :

Rated voltage	48 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-20...70 °C
Protection degree	IP65

Female connector («28 series») :

Locking nut/screw material	Stainless steel
Ergonomic knurled ring : Anodized aluminium	
Contact diameter	26 x Ø 1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Contact arrangement according to UTE C93-422-L2	
Crimping range: 0,25...0,75 mm ²	
Protective sheathing (packaging)	

Accessories (not included) :

- Straight/angled hood (L2826K01N)
- Crimping pliers + adapter (YP2 + YE2)
- Compatible with hood L2826K01N and double-ended cordset H24N28MCL...

Remark :

Fixing instructions available on request

Notes :



- *A* et *B* : Marquage rouge indiquant la position du contact A
- *C* : Marquage rouge indiquant le non verrouillage

N2826F01


Press tools



Dimensions :

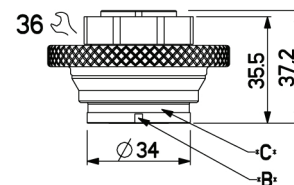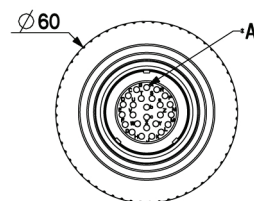

Pin assignment :

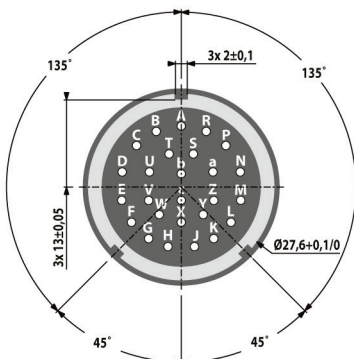

For uses in particularly harsh environments: Please enquire

We reserve the right to modify all or part of characteristics of our products without warning.

Printed on:

24 sept. 2024