



Technical data :	
Operating voltage	10...55 V DC
Nominal current per signal	4 A
Total current	12 A
Insulation resistance	> 100 MΩ
Ambient temperature range	-25...70 °C
Protection :	
Protection degree	Mixte IP67 / IP50 (Jaeger)
Materials :	
Housing	Anodized aluminium
Potting	PUR (UL94-V0 self-extinguishing)
M12 female receptacle :	
Receptacle material	CuZn, nickel-plated
Contact diameter	5 x Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Male connector (Jaeger) :	
Receptacle material	Metal, nickel-plated
Contact diameter	27 x Ø1 mm
Contact material	CuZn, gold-plated
Contact resistance	< 2,5 mΩ
Cable characteristics :	
Sheath material	Halogen free PUR
Wire structure	3 G 1 mm <sup>2</sup> + 16 x 0,34 mm <sup>2</sup>
Conductor class	6
Sheath diameter	10,9 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	EN 50363 & IEC 60811-2-1 & CNOMO
Cable length :	
L standard lengths	0,2 m / 0,5 m / 1 m
Other length	On request
Reference : replace «...» by length required: 002 / 005 / 01	
Accessories (included) :	
9 label holders (KM6/27)	
4 plugs (OBTM12)	

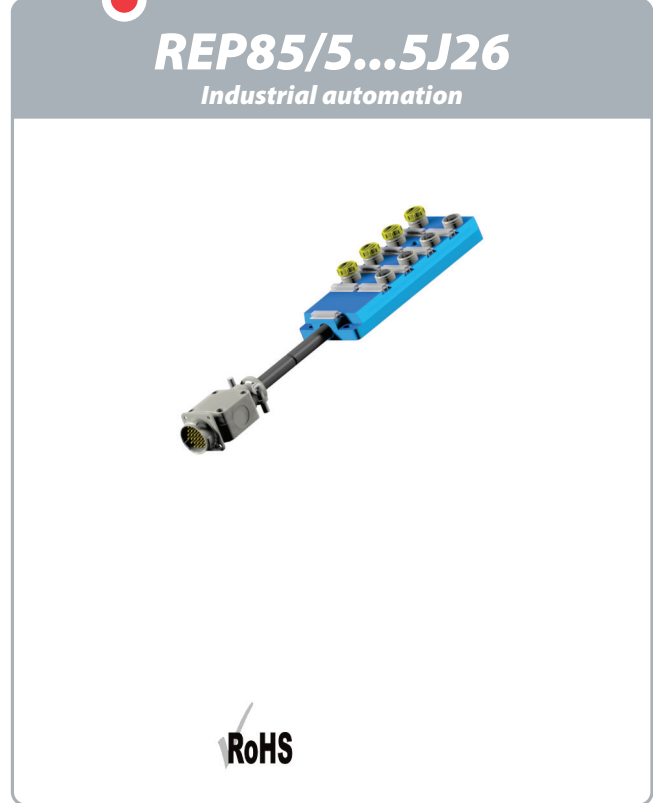

Dimensions :

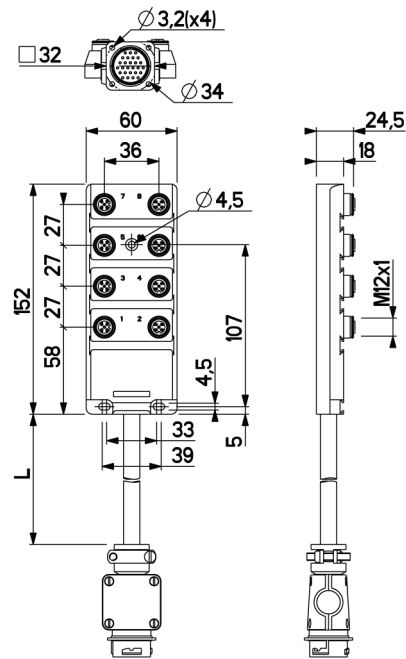

Wiring diagram :

