

**Technical data :**

Operating voltage	10...30V DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C

**Protection :**

Protection degree	IP67
-------------------	------

**M12 straight male connector :**

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

**M12 angled female connector (LEDs) :**

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
LED(s) colour	LEDs (YE / RD / GN)
Compatibility type	PNP
Current consumption per LED	< 5 mA

**Status indication :**

Signal (2)	Red LED
Signal (4)	Yellow LED
Power	Green LED

**Cable characteristics :**

Sheath material	Halogen free PUR
Wire structure	5 x 0,34 mm <sup>2</sup>
Conductor class	6
Sheath diameter	5,65 mm
Minimal sheath (wall) thickness	> 1 mm
Cable construction	according to UL-AWM Style 20549/10493
Halogen free cable	according to DIN VDE 0472 Part 815
Cable silicone free and LABS free	according to PV 3.10.7
Flame resistance	according to UL FT2
Oil resistance	according to UL 758
Admissible torsion	+/- 360 °/ m
Drag chain suitable	
Minimum static bending radius	: 5 x Ø
Minimum dynamic bending radius	: 10 x Ø
Resistant to weld splatters	


**Cable length :**

L length	0,3 m
Other length	On request

**Accessories (included) :**


2 label holders

**Wiring diagram :**

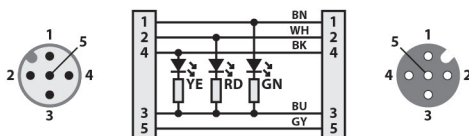

## S12/5MLP3R0034VG

Suitable for welding application

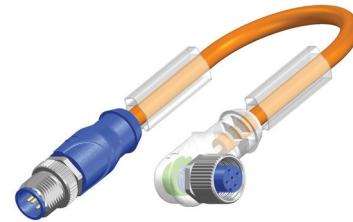

**Dimensions :**

