

**Set including :**


- Aluminium flange
- 1 zinc-plated steel screw CHC M5-16 mm (DIN7984)
- 1 stainless steel screw CHC M2,5-8 mm (DIN912 ISO4762)

**Tie rod compatibles (\*) :**

- Cylindrical tie rod : Ø4...12 mm
- (\*) As long as the space between the tie rod and the cylinder body used is sufficient

**Recommended tightening torque :**

- 1,5 Nm (M5 Screw) / 0,2 Nm (M2,5 Screw)

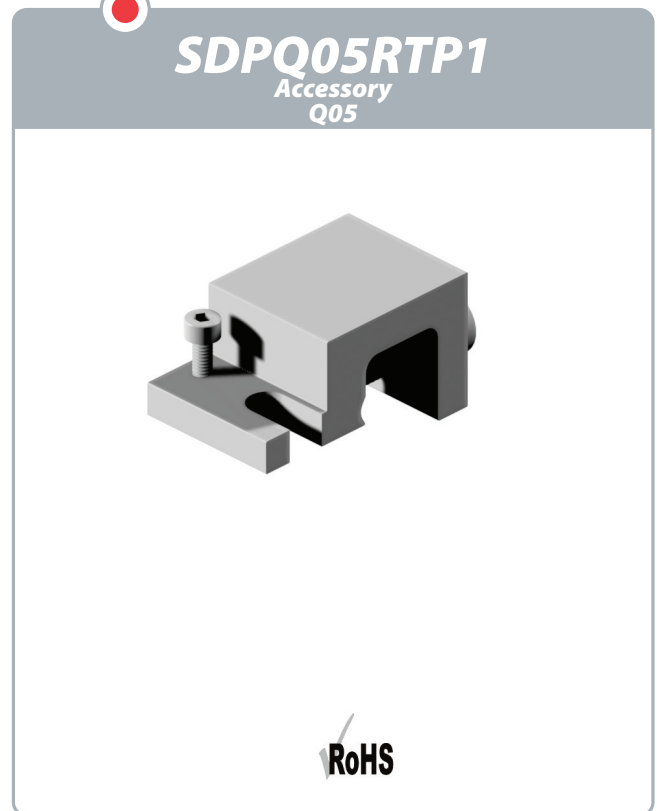

**Dimensions :**

