

**Technical data :**


Rated voltage	24 V DC
Rated current	4 A
Ambient temperature range	-25...80 °C

**Protection :**


Protection degree	IP67
-------------------	------

**M12 straight male connector :**

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
120Ω 0,6W +/-1% Integrated connector resistor	

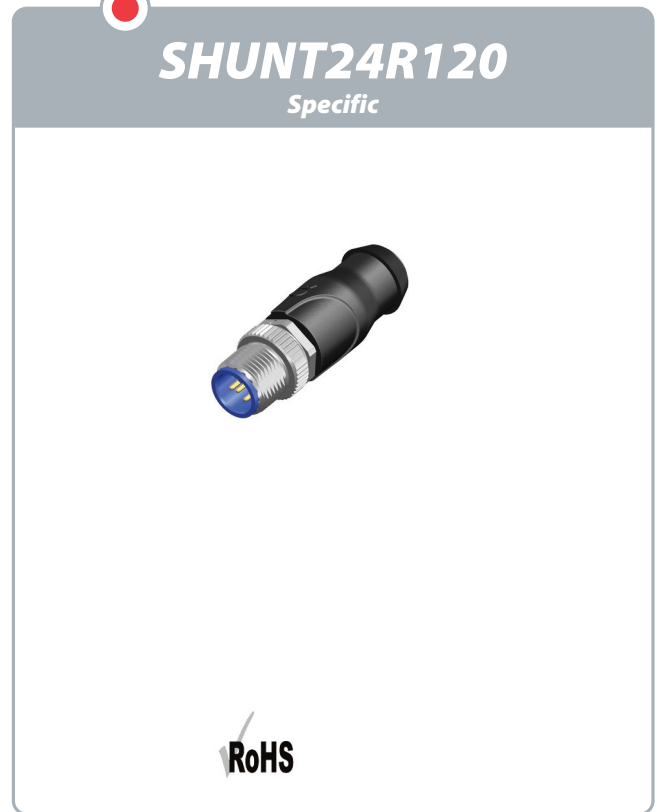

**Dimensions :**



**Wiring diagram :**

