

**Technical data :**

|                           |             |
|---------------------------|-------------|
| Rated voltage             | 60 V AC/DC  |
| Rated current             | 4 A         |
| Insulation resistance     | > 1000 MΩ   |
| Ambient temperature range | -25...70 °C |

**Protection :**

|                   |      |
|-------------------|------|
| Protection degree | IP65 |
|-------------------|------|

**M12 male Y connector :**

|                            |  |
|----------------------------|--|
| Locking nut/screw material | Zamak, nickel-plated                         |
| Overmoulding material      | TPU, self-extinguishing                      |
| Contact diameter           | Ø1 mm  |
| Contact material           | CuZn, pre-plated with nickel and gold-plated |
| Contact resistance         | < 5 mΩ                                       |

**M12 straight female connector (2x) :**

|                                       |  |
|---------------------------------------|--|
| Locking nut/screw material            | Zamak, nickel-plated                         |
| Spot welding splash protection sleeve |  |
| Overmoulding material                 | TPU, self-extinguishing                      |
| Contact diameter                      | Ø1 mm  |
| Contact material                      | CuZn, pre-plated with nickel and gold-plated |
| Contact resistance                    | < 5 mΩ                                       |

**Cable characteristics :**

|                               |                              |
|-------------------------------|------------------------------|
| Sheath material               | PVC                          |
| Wire structure                | 5 G 0,34 mm <sup>2</sup>     |
| Conductor class               | 6                            |
| Sheath diameter               | 5,8 mm                       |
| Flame resistance according to | IEC 60332-1 (VDE 0472-804/B) |
| Oil resistance according to   | CNOMO E03.40.150.N           |

**Cable protection characteristics :**

|  |                      |
|--|----------------------|
| Silicone rubber-coated fiberglass braided sleeving |                      |
| Max. contact temperature                           | +250°C (peak +290°C) |
| Max. sleeving length = 5 m                         |                      |

**Cable length :**

|              |   |
|--------------|---|
| L length     | 0,6 m                                   |
| Other length | On request (max. sleeving length = 5 m) |


**Accessories (included) :**

2 label holders


**Notes :**

\*X\* : Coloured marker

**Wiring diagram :**

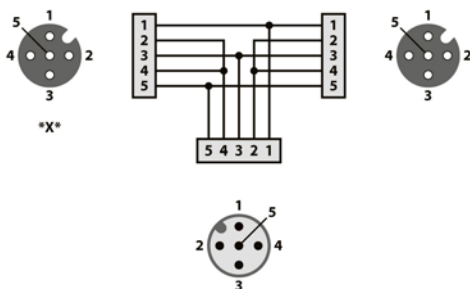

**T12/5MLLD0065TS**  
Welding environment

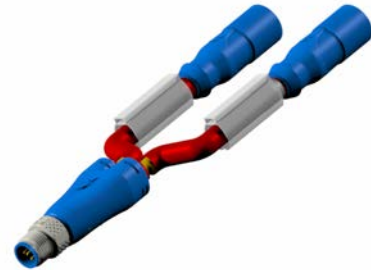

**Dimensions :**

