

### Technical data :

Rated voltage	30 V AC/DC
Rated current	2 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...70 °C

### Protection :

Protection degree	IP65
-------------------	------

### M8 straight male connector :

Locking nut/screw material	CuZn, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

### M8 straight female connector :

Locking nut/screw material	CuZn, nickel-plated
Spot welding splash protection sleeve	
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ

### Cable characteristics :

Sheath material	Halogen free PUR
Wire structure	4 x 0,14 mm <sup>2</sup>
Conductor class	6
Sheath diameter	3,4 mm
Flame resistance according to	IEC 60332-1 (VDE 0472-804/B)
Oil resistance according to	EN 50363 & IEC 60811-2-1

### Cable protection characteristics :

Silicone rubber on fiberglass braided sleeving	
Max. contact temperature	+250°C (peak +290°C)

### Cable length :


L length	0,8 m
Other length	On request

### Accessories (included) :

2 label holders


## T8V/4MLL0085TS

Welding environment



RoHS

### Dimensions :

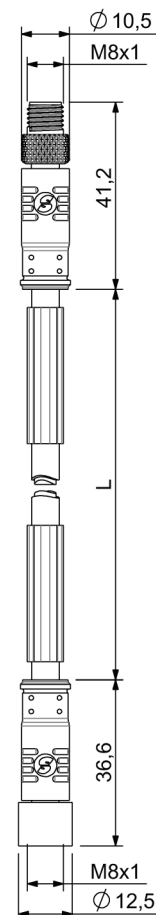

### Wiring diagram :

