

### Technical data :

Rated voltage	48 V AC/DC
Rated current	4 A
Insulation resistance	> 1000 MΩ
Ambient temperature range	-25...80 °C

### Protection :

Protection degree	IP67
-------------------	------

### M12 straight female connector :

Locking nut/screw material	Zamak, nickel-plated
Overmoulding material	TPU, self-extinguishing
Contact diameter	Ø1 mm
Contact material	CuZn, pre-plated with nickel and gold-plated
Contact resistance	< 5 mΩ
Peripheral shielding connected to locking nut/screw	

### Shielded cable characteristics :

Sheath material	Halogen free PUR
Wire structure	5 x 0,34 mm <sup>2</sup>
Sheath diameter	6,5 mm
Tin-plated copper braided shielding covering rate: 85%	
Flame resistance according to	IEC 60332-1-2 (#UL FT2)
Oil resistance according to	Good oil resistance
Drag chain suitable	

### Cable length :

L length	25 m
Other length	On request

### Accessories (included) :


1 label holder

## V12/5L252

Shielded cable



### Dimensions :

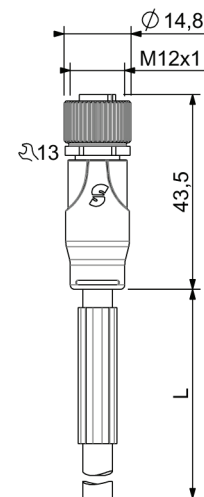

### Wiring diagram :

